



# PIPE HOOK - SPH TYPE - SUMO

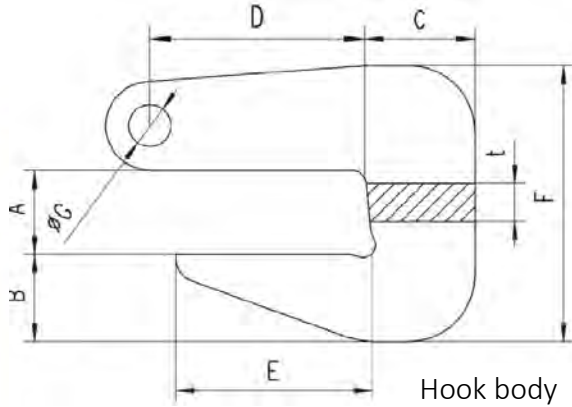

- Used in pairs for safe transporting of pipes
- Sold in a complete set of 2 hooks & 2 shackles

\*WLL is based on per pair of hooks



60° - 90° CHAIN TOP ANGLE / 30° - 45° FROM VERTICAL													
Model	W.L.L. (per pair) kgs	Dimensions											Weight (per pair) kgs
		t mm	A* mm	B mm	C mm	D mm	E mm	F mm	Ø G mm	H mm	Ø I mm	J mm	
SPH 2/A	2000	20	0-40	35	40	62	62	116	16.3	47.6	12.7	30.2	2.4
SPH 4/A	4000	30	0-50	40	48	77	77	142	24.3	72.2	19	44.5	5.6
SPH 6/A	6000	30	0-60	51	62	90	90	173	24.3	72.2	19	44.5	8.3
SPH8/A	8000	40	0-70	55	67	105	105	190	30.3	95.3	25.4	58.7	13.5
SPH 10/A	10000	40	0-80	69	80	115	115	221	30.3	95.3	25.4	58.7	17.8

\*NB. Coated hooks have a 6mm reduction in wall thickness handling capacities.