

# FALL ARRESTER - RANGER SAFETY (SRL) WEBBING WITH ENERGY ABSORBER



- ❑ CE; EN360:2002 Certification
- ❑ Reinforced Nylon Housing, 20mm Dyneema Webbing
- ❑ Webbing Length: 6m\*; Max user weight: 100kg / 220lbs
- ❑ Max fall arrest force: 3.1KN
- ❑ Energy Absorber integrated into lifeline
- ❑ Extends & retracts to the movement of user automatically

\*Other lengths available upon request


\*\*NOTE: Max Service Angle (between webbing & vertical line of product)  
**MUST NOT Exceed 30°** to minimise risk of swing fall

Tag Line  
Supplied



**BOTTOM**

Auto-lock swivel carabiner

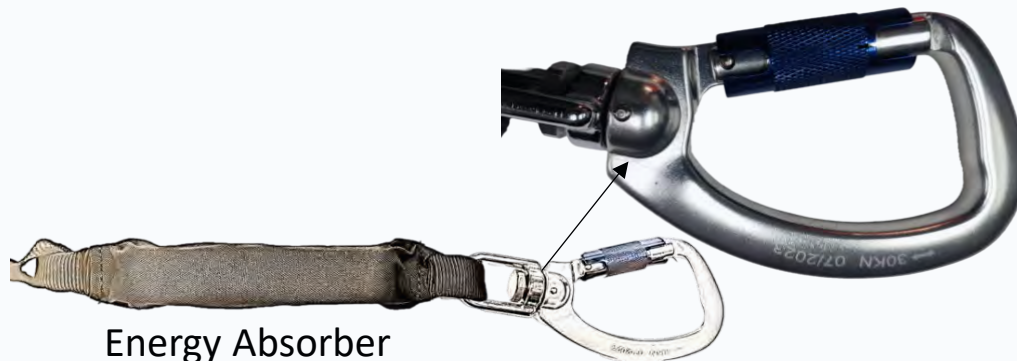

Energy Absorber

**TOP**



Swivel top + auto-lock carabiner attachment

## CABLE TYPE SELF-RETRACTABLE LIFELINE

### RL-06    CE EN 360-2002



- ◆ Housing Material: Reinforced nylon
- ◆ Wire rope diameter: 5mm
- ◆ Working length: 6M
- ◆ Max Arresting Force: 5.9kN
- ◆ Max Arresting Distance: 0.95m
- ◆ Capacity: 100kgs
- ◆ Locking after condition: 5kgs
- ◆ Static strength: 12kN with 3 mins
- ◆ Stainless Swivel Top
- ◆ Internal shock absorber system
- ◆ Quick lock carabiner
- ◆ Indicator Swivel Snaphook (Aluminium)

### RL-15    CE EN 360-2002



- ◆ Housing Material: Aluminum
- ◆ Wire rope diameter: 5mm
- ◆ Working length: 15M
- ◆ Max Arresting Force: 3.2kN
- ◆ Max Arresting Distance: 1.45m
- ◆ Capacity: 100kgs
- ◆ Locking after condition: 5kgs
- ◆ Static strength: 12kN with 3 mins
- ◆ Stainless Swivel Top
- ◆ Internal shock absorber system
- ◆ Quick lock carabiner
- ◆ Indicator Swivel Snaphook (Aluminium)

### RL-10    CE EN 360-2002




- ◆ Housing Material: Reinforced nylon
- ◆ Wire rope diameter: 5mm
- ◆ Working length: 10M
- ◆ Max Arresting Force: 3.5kN
- ◆ Max Arresting Distance: 1.14m
- ◆ Capacity: 100kgs
- ◆ Locking after condition: 5kgs
- ◆ Static strength: 12kN with 3 mins
- ◆ Stainless Swivel Top
- ◆ Internal shock absorber system
- ◆ Quick lock carabiner
- ◆ Indicator Swivel Snaphook (Aluminium)

### RL-20    CE EN 360-2002



- ◆ Housing Material: Aluminum
- ◆ Wire rope diameter: 5mm
- ◆ Working length: 20M
- ◆ Max Arresting Force: 3.2kN
- ◆ Max Arresting Distance: 1.54m
- ◆ Capacity: 100kgs
- ◆ Locking after condition: 5kgs
- ◆ Static strength: 12kN with 3 mins
- ◆ Stainless Swivel Top
- ◆ Internal shock absorber system
- ◆ Quick lock carabiner
- ◆ Indicator Swivel Snaphook (Aluminium)

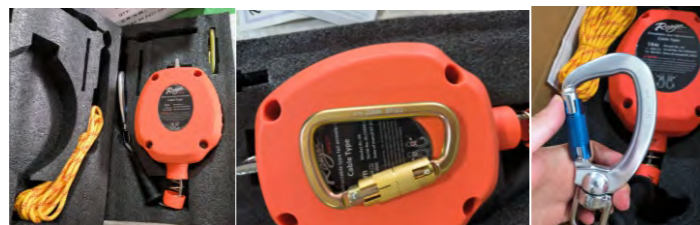

## WEBBING TYPE SELF-RETRACTABLE LIFELINE

RETRACTABLE LIFELINE

RETRACTABLE LIFELINE



(With Absorber)

### WRL/WARL-1.5/02/03 CE EN 360-2002

- ◆ Housing Material: High-Strength ABS
- ◆ Webbing: 20mm Dyneema
- ◆ Working length: 1.5M/2M/3M
- ◆ Max Arresting Force: 5.1kN/5.3kN/2.8kN
- ◆ Max Arresting Distance: 0.88M/0.98M/1.91M
- ◆ Capacity: 100kgs
- ◆ Locking after condition: 5kgs
- ◆ Static strength: 12kN with 3 mins
- ◆ Stainless Swivel Top
- ◆ Internal shock absorber system
- ◆ Quick lock carabiner
- ◆ Indicator Swivel Snaphook (Aluminium)
- ◆ Sewn-in Fall Indicator



### SRL-2D CE EN 360-2002

- ◆ Housing Material: PA6 Enhancement
- ◆ Webbing: 17mm Dyneema
- ◆ Working length: 1.8M/2M
- ◆ Max Arresting Force: <6kN
- ◆ Max Arresting Distance: <2M
- ◆ Capacity: 100kgs
- ◆ Locking after condition: 5kgs
- ◆ Static strength: 12kN with 3 mins
- ◆ Stainless Swivel Top
- ◆ Internal shock absorber system
- ◆ Triple lock Aluminum carabiner
- ◆ Indicator Swivel Snaphook (Aluminium)
- ◆ Sewn-in Fall Indicator



(With Absorber)

### WRL-06/WARL-06 CE EN 360-2002

- ◆ Housing Material: Reinforced nylon
- ◆ Webbing: 20mm Dyneema
- ◆ Working length: 6M
- ◆ Max Arresting Force: 3.1kN
- ◆ Max Arresting Distance: 1.45m
- ◆ Capacity: 100kgs
- ◆ Locking after condition: 5kgs
- ◆ Static strength: 12kN with 3 mins
- ◆ Stainless Swivel Top
- ◆ Internal shock absorber system
- ◆ Quick lock carabiner
- ◆ Indicator Swivel Snaphook (Aluminium)



### SRL-2DB CE EN 360-2002

- ◆ Housing Material: PA6 Enhancement
- ◆ Webbing: 17mm Dyneema
- ◆ Working length: 1.8M/2M
- ◆ Max Arresting Force: <6kN
- ◆ Max Arresting Distance: <2M
- ◆ Capacity: 100kgs
- ◆ Locking after condition: 5kgs
- ◆ Static strength: 12kN with 3 mins
- ◆ Stainless Swivel Top
- ◆ Internal shock absorber system
- ◆ Triple lock Aluminum carabiner
- ◆ Indicator Snaphook (Aluminium)
- ◆ Sewn-in Fall Indicator

