


CONCRETE PRECAST ELEMENT LIFTING - LIFTING CLUTCH

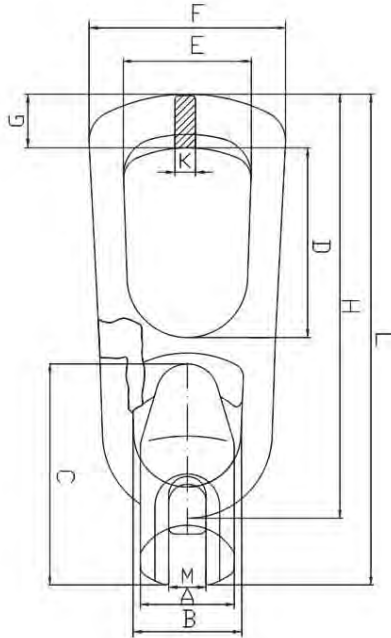

- Component A: Cast Super Alloy
- Component B: Forged Alloy Steel
- 100% Magnaflux Crack Detection
- Surface Finish: Electro-galvanizing/ Powder Plastified
- Safety Factor: 4:1

Model	W.L.L.	B.L.	A±1 (mm)	B±1 (mm)	C±2 (mm)	D±1 (mm)	E±1 (mm)	F±1 (mm)	H±3 (mm)	M±2 (mm)	L±2 (mm)	G (mm)	K±0.5 (mm)	Weight (kg/pc)
8-TP820-1-1.3T	1.3T	5.2T	33	42	80.4	70.5	45	73	160	11	186	20.5	12.5	0.89
8-TP820-1.5-2.5T	2.5T	10T	41	49	102	85	57	88	188	16	227	27	14	1.30
8-TP820-3-5T	5T	20T	55	70	133	88	69	110	242	22	282	35	18	3.24
8-TP820-6-10T	10T	40T	73	92	176	116	83	161	342	30	391	51	27	10.00
8-TP820-12-20T	20T	80T	110	114.5	224	133.5	107.5	182	437	42	497	77	31	20.40
8-TP820-12-32T	32T	128T	154	172	307	189	164	272	560	52	661	102	40	46.50