


CONNECTING LINK - A7 (SPRING & SHAFT)



Spring & pin shaft

- Forged super alloy steel
- Quenched & Tempered
- 100% Magnaflux Crack Detection
- Individually proof-tested at 2.5X Working Load Limit
- Fatigue tested at 1.5X Working Load Limit for 20,000 cycles

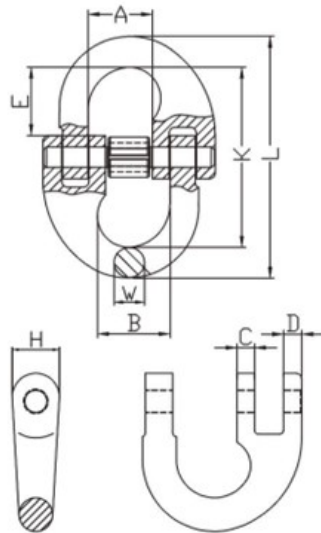

Type	WWL (Tons)	BL (Tons)	Dimension in mm.									Weight (kg)
			A±1.5	B±1.5	L±2.5	K±2	W±1	H±1	C±0.2	D±0.3	E±1.5	
1/4	1.5	6	16.5	18	67	51	8	13	4	4	18.5	0.13
9/32	1.6	6.4	18	18	64	48.6	8	13	4	5.1	17.6	0.15
5/16	2	8	17.7	21.8	78.5	58.5	9.8	14.5	6.5	6.6	21.5	0.15
3/8	3.2	12.8	22	24	87.5	63.6	12	17	6.2	8.1	21.5	0.33
1/2	5.4	21.6	28.5	35	115.5	85.5	15	21.6	7.8	7.8	28	0.76
5/8	8.2	32.8	33	40.5	143	106	18.5	26	9.5	10	36	1.3
3/4	12.8	51.2	41	47	162	116	23	32	12	13	39	2.27
7/8	15.5	62	50.5	54.5	188.5	136.5	26	38	13	15.5	47.5	3.4