


MASTER LINK ASSEMBLY

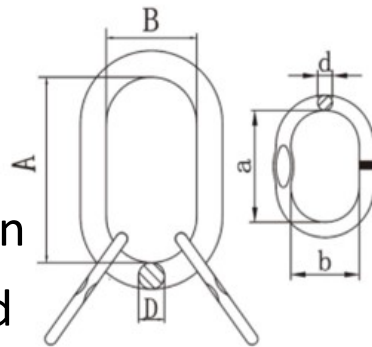

- Forged super alloy steel
- Quenched & Tempered
- 100% Magnaflux Crack Detection
- Surface Finish: Powder Plastified
- Individually proof-tested at Manufacturing Proof Force

Dimension in mm.

MODEL	WLL (Tons)	A	B	D	a	b	d	S	WEIGHT (Kg)
MA16	3.8	120	70	16	95	51	13	7.5±0.5	1.19
MA20	5.8	170	90	20	120	70	16	9±0.5	2.5
MA20-B	5.8	170	90	20	120	70	16	9±0.5	2.5
MA22	7.6	170	90	22	150	80	20	11±0.5	3.77
MA22-B	7.6	160	90	22	150	80	20	11±0.5	3.77
Q23B	5.8	270	140	22	150	75	16	9±0.5	3.6
Q23B-B	5.8	270	140	22	120	70	16	9±0.5	3.3
Q23B-C	5.8	270	140	22	150	75	16	9±0.5	3.6
MA25	10	190	100	25	150	80	20	11±0.5	4.45
MA25-B	10	190	102	25	150	80	20	11±0.5	4.45
Q29B	11.8	270	140	28	140	70	20	11±0.5	5.6
Q29-B-B	11.8	270	140	28	150	70	20	11±0.5	5.9
Q29B-C	11.8	270	140	28	140	70	20	11±0.5	5.6
MA28	12.7	210	110	28	170	90	22	12±0.5	6.12
MA28-B	12.7	210	110	28	170	90	22	12±0.5	6.12
MA32	15.2	270	140	32	190	100	25	13±0.5	9.47
MA32-C	15.2	270	140	32	190	100	25	13±0.5	9.47
MA38	25	270	140	38	270	140	32	17±0.5	17.4
MA38-B	17	420	220	38	180	100	25	17±0.5	15
MA38-C	25	270	140	38	270	140	32	17±0.5	17.4
MA45	34	320	170	45	270	140	38	20±0.5	26.76
MA50	40	380	200	50	270	140	38	-	33.2
MA60	58	430	220	60	380	200	50	-	65
MA70	84	500	250	70	430	220	60	-	103