


SWIVEL SELF LOCKING HOOK



- Forged super alloy steel; Quenched & Tempered
- Suitable for EN812-2 G80 Chain
- 100% Magnaflux Crack Detection
- Individually proof-tested at 2.5X Working Load Limit
- Fatigue tested at 1.5X Working Load Limit for 20,000 cycles
- Surface Finish: Powder Plastified
- Positive lock latch is self-locked when hook is loaded

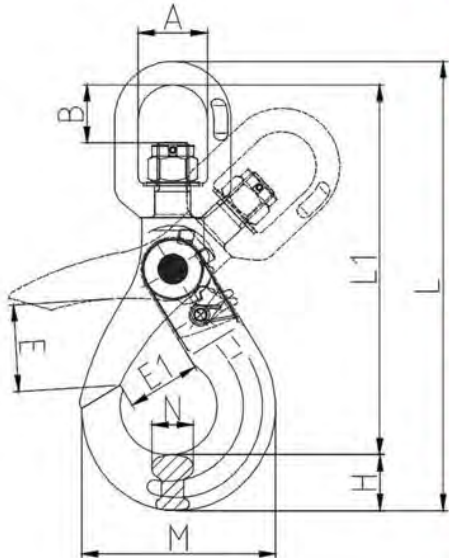

Model	W.L.L.	B.L	A±1 (mm)	B±1 (mm)	E (mm)	E1 (mm)	L1 (mm)	L (mm)	H (mm)	N (mm)	M (mm)	Weight (kg/pc)
8-TP809-06	1.12T	4.48T	32.5±1	25.5±2	32±2	28±1	152±3	184±3	20±1	15	73±2	0.71
8-TP809-7/8	2T	8T	36±1	29.5±2	40±3	35±1	189±3	228±3	26±1	20	91±2	1.15
8-TP809-10	3.15T	12.6T	42±1	35±2	48±3	45±2	223±3	268±3	30±1.5	26±1	108±2	1.86
8-TP809-13	5.3T	21.2T	50±1	41±2	57±3	52.5±2	267±4	323±4	40±1.5	33±1	142±3	3.51
8-TP809-16	8T	32T	61±1.5	58±2.5	65±4	63±2	339±4	413±4	50.5±2	38±2	168.6±3	7.33
8-TP809-18/20	12.5T	50T	72±1.5	63±2.5	82±4	82±2	370±5	452±5	55±2	50±2	185±4	10.3
8-TP809-22	15T	60T	97±2	98±3	80±5	76±3	466±5	564±5	67±2	52±3	202±4	17.5
8-TP809-26	21.2T	84.8T	123±2	115±3	109±5	96±4	544±6	661±6	75±3	60±3	239±5	23.0
8-TP809-32	31.5T	126T	140±2	147±3	131±6	131±4	679±6	830±6	97±3	79.5±3	329±5	81.0