


MASTER LINK



- Compliance to EN1677-4
- The WLL of for links, rings, masterlink , and assemblies are determined from the proof load, not from breaking force

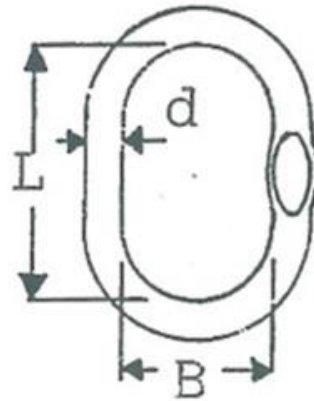

Dimension in mm.

MODEL	TYPE	WLL (TONS)	d	B	L	WEIGHT (KG)
3001001	11B4	2.1	11	40	83	0.2
3001002	13B5*	2.6	13	51	95	0.3
3001003	13B6*	2.4	13	60	115	0.4
3001004	16B6*	3.8	16	70	120	0.6
3001005	16B7	2.8	16	100	190	0.9
3001006	20B6*	6.4	20	80	150	1.1
3001007	20B7	5.8	20	90	170	1.3
3001008	22B6*	7.6	22	90	170	1.6
3001009	22B7	6.4	22	110	210	1.9
3001010	25B6*	10	25	100	190	2.3
3001011	28B6*	12.7	28	110	210	3.2
3001012	28B7	10.5	28	140	270	4
3001013	32B6*	15.2	32	140	270	5.3
3001014	38B6*	25.1	38	140	270	7.5
3001015	38B7	17	38	220	420	11
3001016	45B6	34	45	170	320	12.5
3001017	45B7	24	45	250	470	17.5
3001018	50B6	40	50	200	380	18
3001019	60B6	58	60	200	430	30
3001020	70B6	84	70	250	500	44

* Fits Omega